


## Industrial Balances



GP Series **SHS Sensor**  
**Built-in Motorized Calibration Weight**

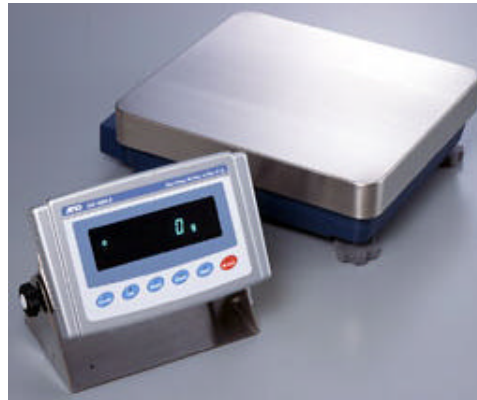

- SHS Super Hybrid Sensor
- 888 VFD Display
- FDC Full Digital Calibration
- Motor Calibration
- CAL
- AAA Accuracy Excellence
- GLP
- IP65
- SPLASH
- RS-232C
- COMPARATOR
- ON/OFF
- WinCT
- Option
- Quantity

## Features [Details](#)

- Water & Dust Proof IP -65/NEMA4 Compliant
- GLP/GMP/ISO Compliant
- Standard RS -232C Interface
- ID Number
- Density determination
- HI, OK, LO Indicator
- Accumulation of weighing results
- Internal Calibration
- Display Auto Power OFF
- Auto Power ON
- Data Memory
- Time & Date
- Auto Self Checking
- Optional Under hook
- Interval Time Setting
- Auto Re-Zero
- Large Stainless Steel Weighing Pan
- Multiple Weighing Units & Programmable Unit
- Smart Range\*
- Bundled with A&D's new [WinCT Software](#)

## Options

- GP-04: Comparator Output (Relay with Buzzer)/RS-232C/Current Loop
- GP-06: Analog/Current Loop Output
- GP-07: 5-meter connection cable (For GP-30KS & GP-100KS)
- GP-20: Under hook (For GP -12K/20K/22K/30K/30KS and GP-40K)
- GP-21: Under hook (For GP -60K/100K/100KS and GP-102K)

## Accessories

- AX-KO1710-200: RS-232C cable (25P -9P)
- AX-SW-128: Foot Switch

## Peripherals *(sold separately)*

- AD-1682: Rechargeable Battery
- AD-8920: Remote Display
- AD-8121: Dot Matrix Compact Printer
- AD-8118B: Universal Printer

Model	Capacity	Resolution	Pan Size
GP-12K	12kg	0.1g	344 x384mm
GP-20K	21kg	0.1g	344 x384mm
GP-32K	31kg	1/0.1g(samrt range)*	344 x384mm
GP-30K	31kg	0.1 g	344 x384mm
GP-30KS(separate)	31kg	0.1g	344 x384mm
GP-40K	41kg	0.5g	344 x384mm
GP-60K	61kg	1g	344 x384mm
GP-100K	101kg	1g	346 x386mm
GP-100KS(separate)	101kg	1g	346 x386mm
GP102K	101kg	10/1g (samrt range)*	346 x386mm